




This is a typical British plug

How to wire a British plug



Loosen the centre screw

Remove the cover



Remove the strap



All British plugs have a fuse

Choose a fuse with the right amperage



Measure the flex against the terminals

The green and yellow wire is the longest



Cut away the outer sheath

Do not damage the wires




Remove the insulation with wire strippers.

Do not damage the wires



Twist the wires

Bend the wires

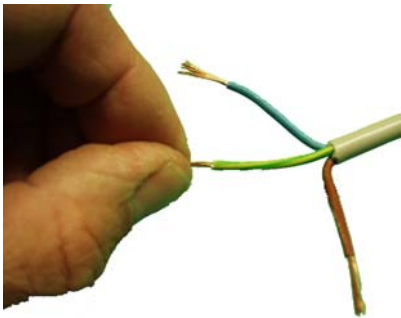

Loosen the terminal screws.

Connect the brown wire to the terminal with the fuse.

Connect the blue wire to the N terminal.

Connect the green and yellow wire to the E terminal.

Tighten the terminal screws.



Put the strap on.

Tighten the screws.

Put the cover on.

Tighten the centre screw.

